



此规格书适用于 EW-M2068S-#T 全系防水接线盒

## 一、产品外形及尺寸


### 1、EW-M2068S-2T

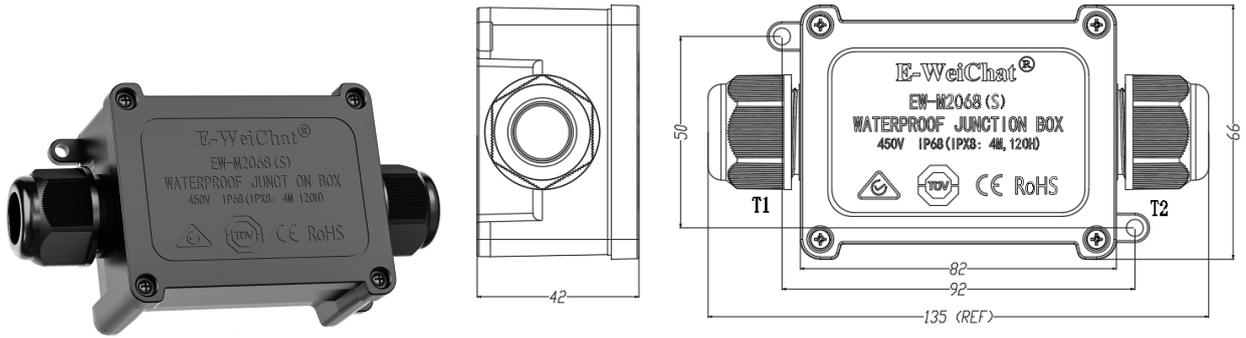


### 2、EW-M2068S-3T

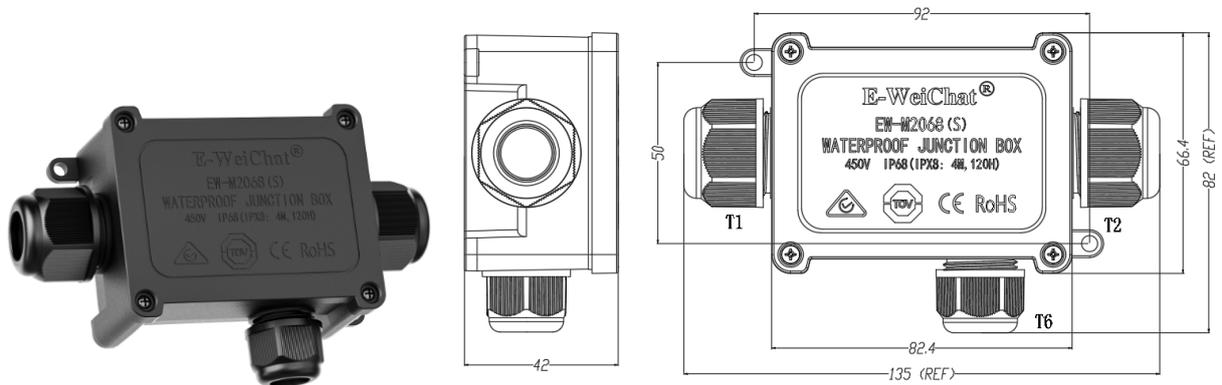


### 3、EW-M2068S-4TA

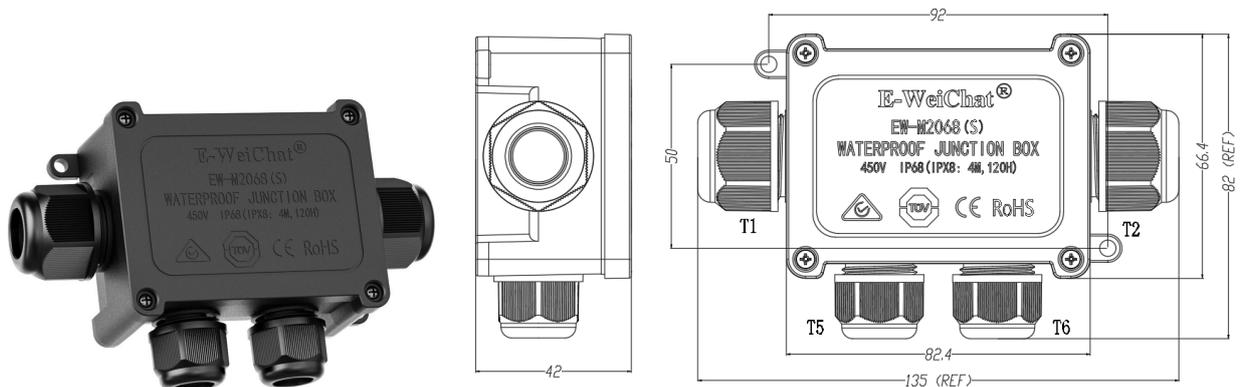


## 4、EW-M2068S-4TB

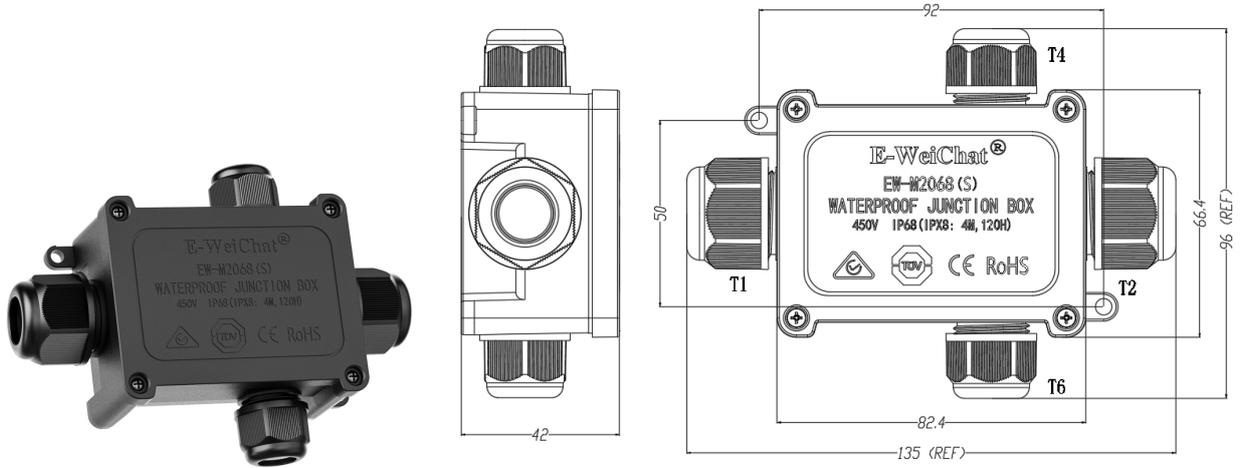

## 5、EW-M2068S-5T

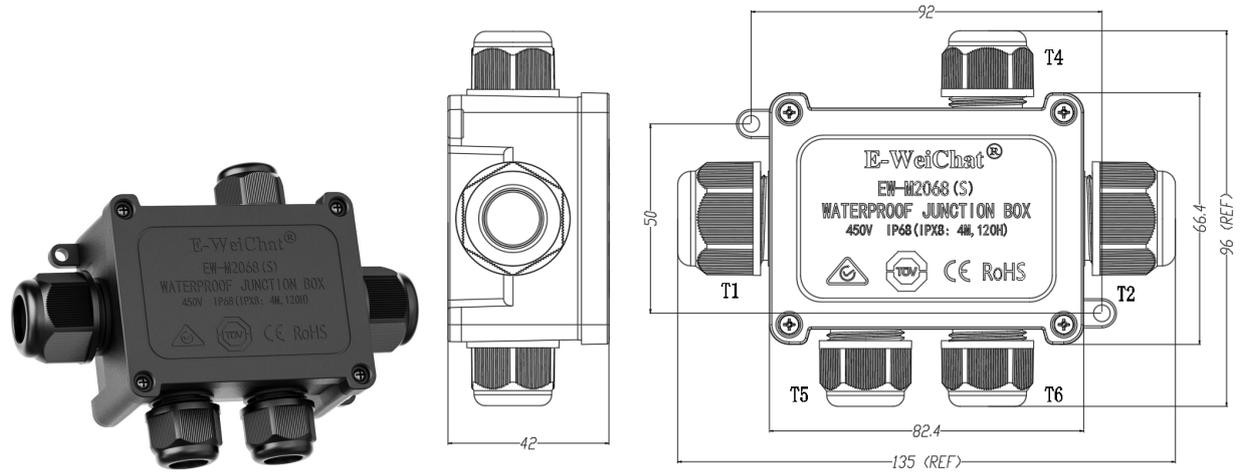

## 6、EW-M2068S-6T


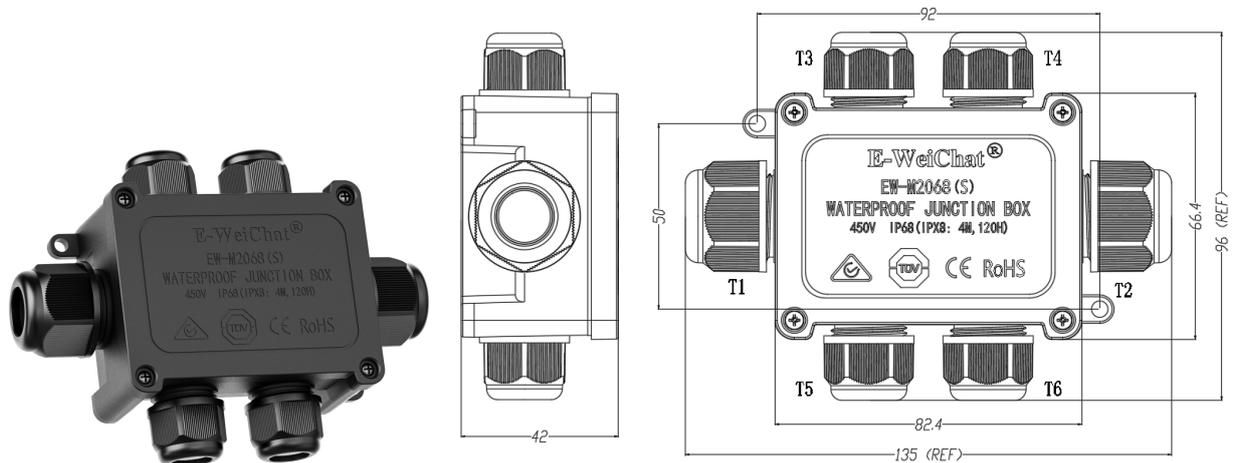


## 二、产品接线规格

产品型号	接线口编号	螺纹规格	许用线径
EW-M2068S-#T	T1/T2	M25	$\phi 12 \sim 14$ mm $\phi 8.5 \sim 12$ mm $\phi 5 \sim 8.5$ mm
	T3 / T4 / T5 / T6	M20	$\phi 8.5 \sim 11.5$ mm $\phi 5 \sim 8.5$ mm

## 三、防水盒内腔尺寸及可选配端子

### 1、内腔尺寸：72\*48\*32mm

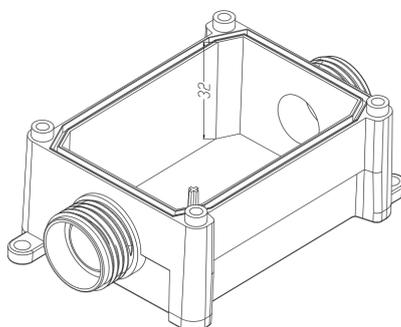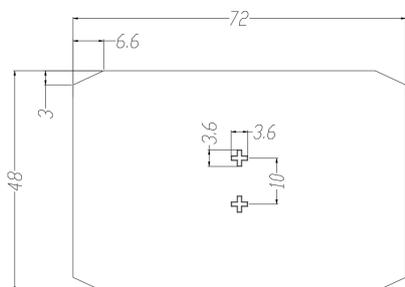

### 2、可选配端子

产品型号	端子类别	端子图片
EW-M2068S-#T	PA12 系列	
	PCT2 系列	

## 四、产品参数

额定电压：450V AC/DC

接线规格：0.5~6.0 mm<sup>2</sup>

防水等级：IP68 (4m/120H)

环境温度：-40℃~+105℃

认 证：TUV、RoHS、CE 等